



# hd Slim265

## Design Subwoofer

The **hd Slim265** is a passive design subwoofer equipped with two 6" woofers in bass reflex tuning. The ultra-compact dimensions allow decentralized and unobtrusive positioning of subwoofers on ceilings, walls or floors in small to medium-sized sound reinforcement applications such as churches, restaurants or conference rooms. The hd Slim265 can be installed flexibly and easily with brackets on a wall or ceiling or can be used on the floor using the adjustable feet. Terminal connections on the loudspeaker side ensure a tool-free and quick connection of the loudspeaker. The loudspeaker can be customized in all RAL colors for optimal adaptation to the room architecture. Due to the super flat design of just 102 mm, the hd Slim265 requires operation on Harmonic Design system amplifiers for precise and unobtrusive low-frequency reproduction. The selectable impedance of 4 or 16 ohms efficiently and budget-friendly uses the existing amplifier resources.



### Features

- Operation on HD system amplifier
- 102 mm extremely flat design
- elegant design
- precise low-frequency reproduction
- Wall, ceiling or floor mounting
- decentralized placeable for best bass distribution
- extends frequency response for all hd speakers
- RAL colors available


### Application

Restaurants, Bars, Airports, Train Stations, Home Theater, Conference Rooms, Hotels, A / V Installations, Multimedia Applications, Meeting Rooms, TV Studios, Churches



<b>Model</b>	<b>hd Slim265</b>
<b>Order number</b>	40045
<b>Acoustic design</b>	Bass reflex, downfire
<b>Transducers</b>	2x 6" ferrite woofer
<b>Impedance</b>	4 or 16 Ω, specify on order
<b>Crossover</b>	variable according to the preset
<b>Coverage (hor x ver)</b>	omnidirectional
<b>Frequency range (-6dB)</b>	55 Hz - 200 Hz
<b>Sensitivity (1W / 1m)</b>	98 dB
<b>Power Rating AES / Peak</b>	300 / 600 W
<b>SPLmax @ 10% THD</b>	118 dB
<b>Enclosure</b>	braced multiplex housing with fine Warnex textured paint black, clamp terminal on the loudspeaker side
<b>Optional Accessories</b>	Wall bracket set (Art. 900864) Leveling feet for floor application (Art. 900867), Weatherproof (Art. 40610) RAL color (Art. 1073)
<b>Weight</b>	9 kg
<b>Dimensions (W x H x D)</b>	400 x 102 x 584 mm

# hd Slim265 datasheet


## Dimensions [mm]

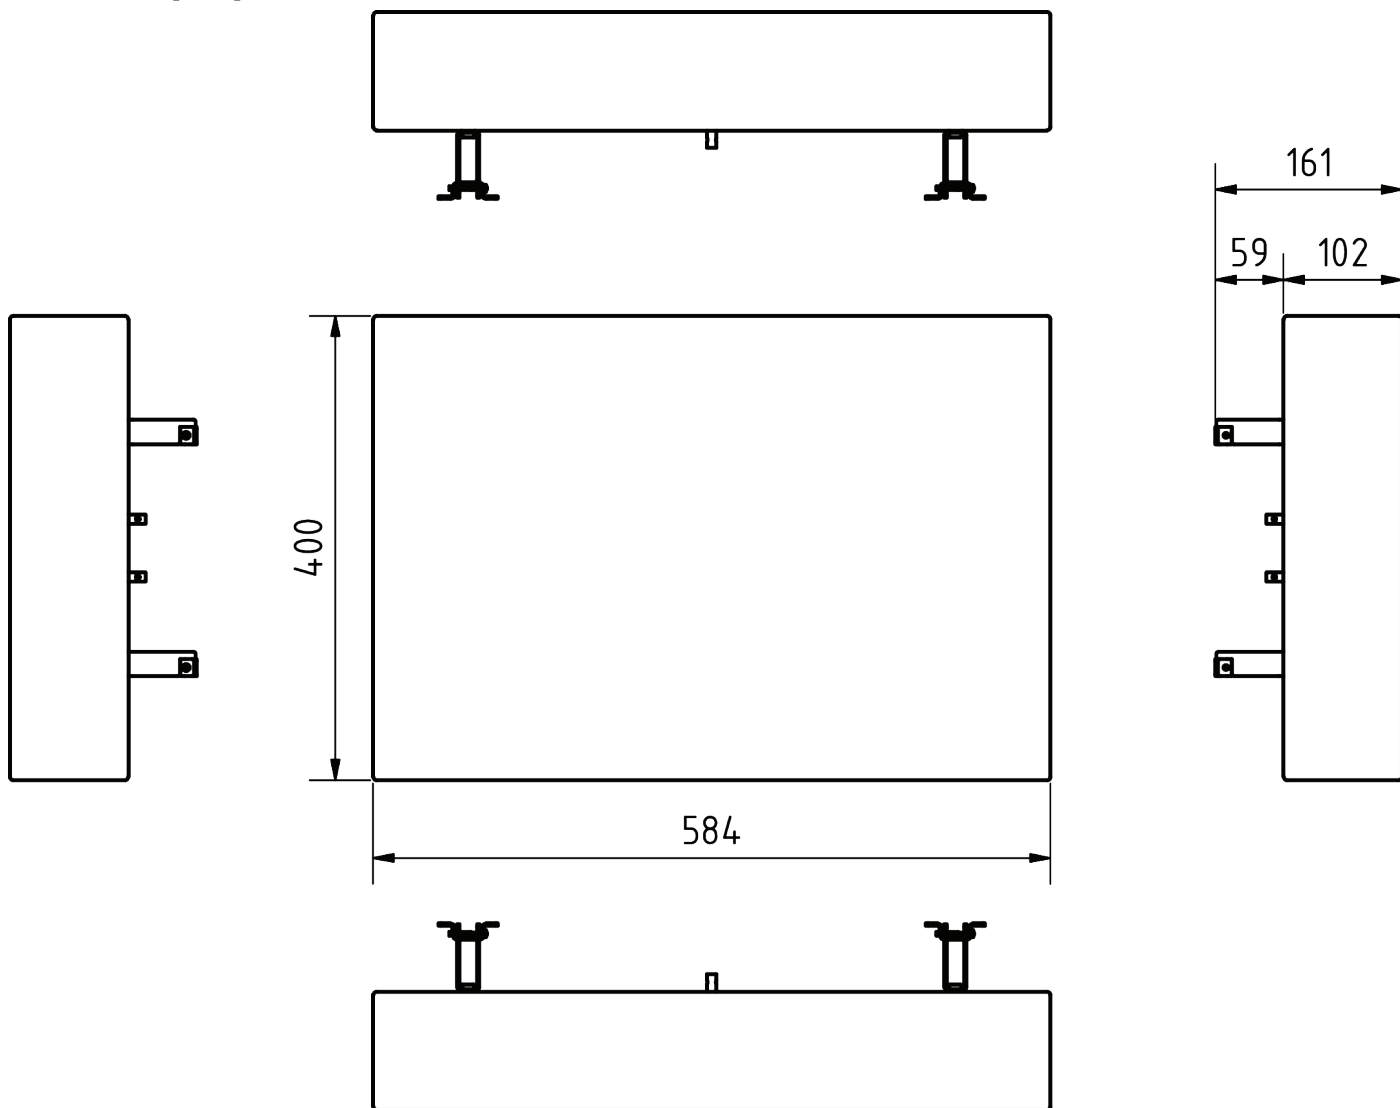

## Impedance

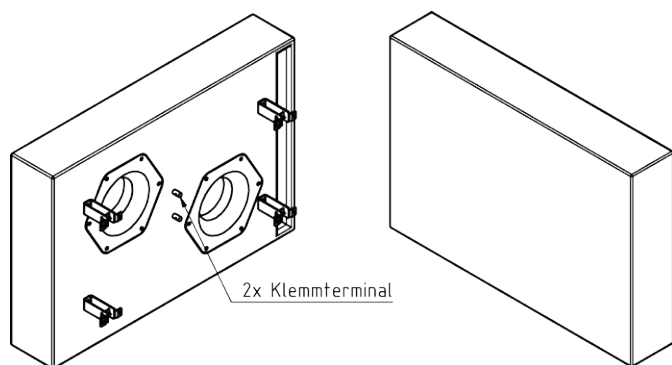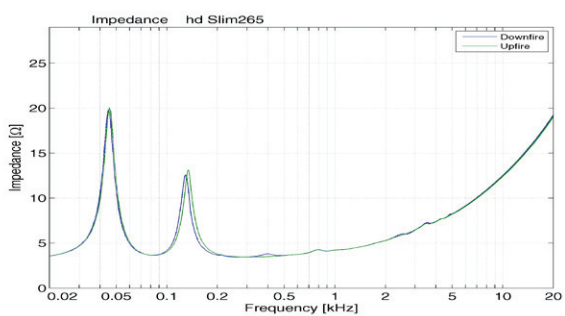


## Frequency response with DSP preset

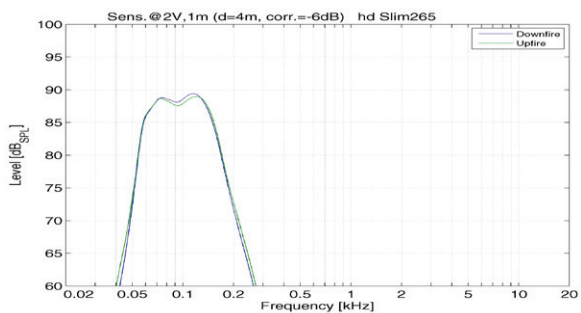

# hd Slim265 datasheet

## Accessories

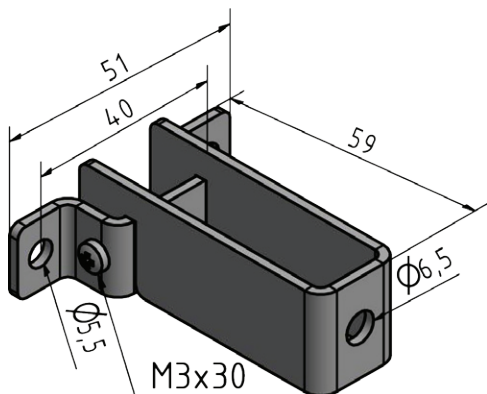

### Wall bracket Set Slim265

Wall bracket set for unobtrusive mounting of the subwoofer on the wall or ceiling

Order number: 900864



### Leveling feet for floor application Slim265

Adjustable feet for screwing on for use as a down-fire subwoofer on the floor

Order number: 900867



### RAL color

Special color per article according to RAL color chart

Order number: 1073



### Weather resistant

Impregnation against weather influences

Order number: 4610